


ANYAPPS-SECURITY CABLE-COAX WITH LAN CABLE

Coax cable with lan Cable used to Video Monitoring System



应用

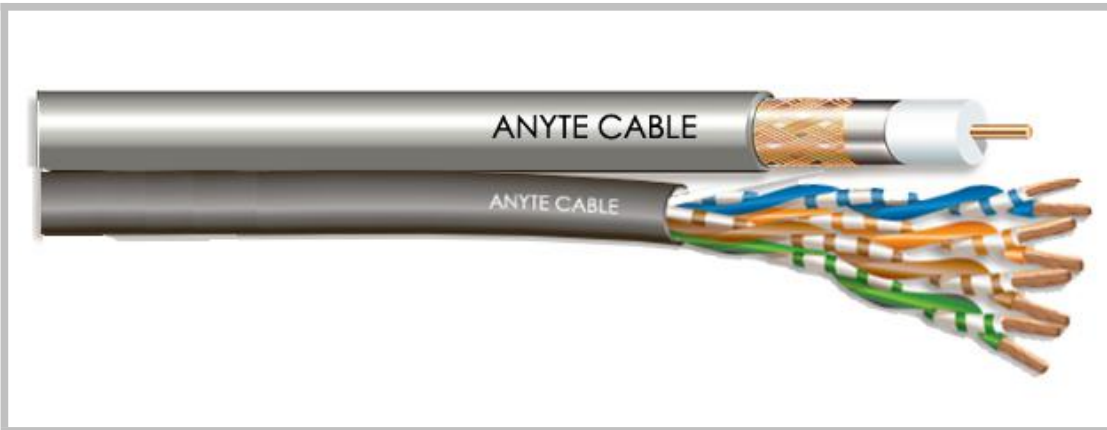

The standard network system cable. This cable is the first choice for Network project and CATV project .

结构

RG6

Conductor: Solid or strands of fine (tin) copper wire, or CCS, CCA materials.

Insulation :PE Foamed or PE Solid

AL foil tape 100% covered

(optional single non-stick aluminum foil, single stick aluminum foil, double sticky aluminum foil, non-stick double-sided aluminum foil and so on)

Copper or tinned copper wire braid or spiral shielding. The coverage of 85%

(optional Al-mg, CCA and so on)

Sheath: PVC mixture (color can be customized according to customer requirements)

CAT5E

7 strands of fine (tin) copper wire

UL444 stand HDPE PVC insulation
 Two cores twisted, total 4 pair
 Special PVC sheath

特点

Meet UL444 standards, UL13 standards, UL1685 fire test, NEC 800, NEC725
 Without noxious material, acc. To ROHS.
 Construction saving cost, facilitate management.
 This product conforms EEC procedures 73/23 (low voltage procedures) of CE rules
 The CE authentication, make cable can use in Europe and other north American market at the same time.

性能

Rated voltage:30V
 operating temperature: Mobile installation:-5 ° C to +80 ° C , fixed installation:-40 ° C to 80 ° C

part	conductor		Insulation O.D. mm	Insulation material	shielding		OD mm	Sheath material	impedance ohm	capacitance pF/m	attenuation dB/km
	No./mm	material			Wrapped with aluminum foil	braid					
SECURG6CAT5E	1/1.02	CU/CCS	4.57	PEF	100%	96/112/128/0.12 BC/AL/TC	7.0	PVC	75	41	66
	0.5	CU	0.95	PE	/	/	5.0	PVC			

※ Can produce cable under your special request

