


ANYAPPS-CONTAINER HOUSE-DOUBLE INSU CABLE

Comply With SAA/UL/CSA/CE/BS Standard

Single Core Double Insulation Cable



应用

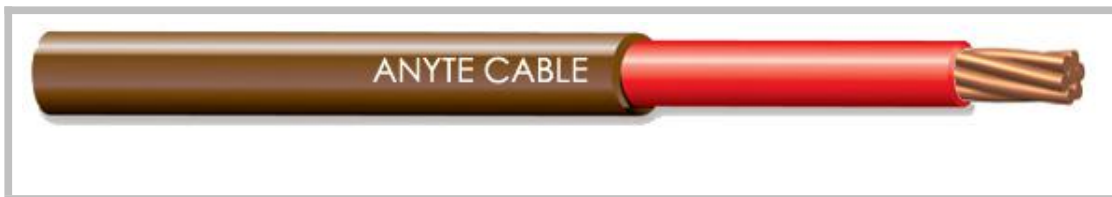

Applies to domestic, commercial and industrial direct burial or underground pipeline, will not cause the conductor and PVC compromised. Particularly suitable for the construction and exporting to Australia, America, Europe and other to internally wire in prefabricated house, container, refrigerated cabinets and saloon cars and other.

结构

7 wire twist or solid bare copper wires as conductor, meet with multi-countries' standards

Special PVC core insulation, which Temp. Scope from -40---+105 °C (Colors can be determined by customers)

特点

Adapting a standard thickness, easy stripping and cutting
With alkali, oil, moisture, mold resistant, and environmental and other features
Round soft or flat sheathed cable in line with the multi-national standards,

flexibility enhancement, and more convenient to install
SAA / UL / CSA / CE / BS standard, so the cable can be used in Australia,
America, Europe and other markets.

性能

Rated voltage: 300/500 V, 450/750V, 0.6/1KV

Temperature Range: Movable installation: -5° C to +105 ° C

Fixed installation: -40 ° C to +105° C

此款线材更详细的标准参数烦请翻阅以下页码：

SAA 标准：本样本第 133 页

UL/CSA 标准：本样本第 78 页,第 95 页

CE 标准：本样本第 104 页-第 115 页

BS 标准：本样本第 141 页

For this style cable, more information please refer to below pages:

SAA Standard: Page 139

UL/CSA Standard: Page 83 and Page 96

CE Standard: Page 123 and Page 125

BS Standard: Page 147

※ **Can produce cable under your special request**