


ANYCOMPLEX- YFFB-1000 (300/500V)

Flex Flat Track Cable YFFB-1000

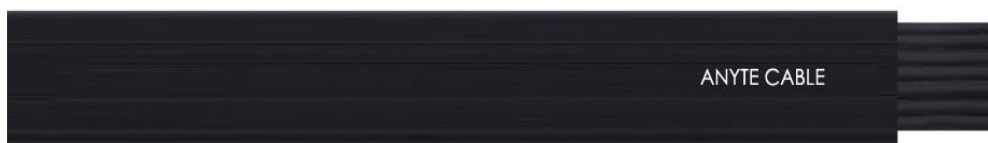

应用

- Power, control and connection cables for drive systems . fixed installations and for occasional movements without forced force in a fixed direction. Suitable for indoor use.

特点

- No hazardous substances, RoHS or REACH compliant
- Conforms to CE/TUV standards, etc.
- Tensile strength, tear resistance, flexibility,
- good performance and stability

结构

- Conductor: Multiple strands of fine oxygen-free bare copper wire, class 5
- Insulation: special PVC mix
- Core identification: colored or numbered, ground wire in yellow/green (optional)
- Core line structure: in a line or flower shaped.
- Shielding :braided copper wire shield (optional)
- Sheathing material: special PVC mix
- Sheath color: black or gray (can be customized)

Operating voltage: 0.6/1KV

性能

- Minimum bending radius:
 - mobile installation: 10x cable OD
- Operating temperature range:
 - mobile installation: -5° C to +70° C

Type	Cores*size	O. D.	weight
YFFB-1000	3×10	26.3×9.7	563.2
YFFB-1000	4×10	34.4×9.7	741.9
YFFB-1000	5×10	42.5×9.7	920.5
YFFB-1000	3×16	29.9×10.9	783.7
YFFB-1000	4×16	39.2×10.9	1034.8
YFFB-1000	5×16	48.5×10.9	1285.9
YFFB-1000	3×25	37.3×13.5	1215.5
YFFB-1000	4×25	49×13.5	1606.8
YFFB-1000	5×25	60.7×13.5	1998.1
YFFB-1000	3×35	42.6×15.4	1620.3
YFFB-1000	4×35	56×15.4	2143.2

Type	Cores*size	O. D.	weight
YFFB-1000	5×35	69.4×15.4	2666.0
YFFB-1000	3×50	48.2×17.4	2192.5
YFFB-1000	4×50	63.4×17.4	2902.2
YFFB-1000	5×50	78.6×17.4	3612.0
YFFB-1000	3×70	55.1×19.7	2937.3
YFFB-1000	4×70	72.6×19.7	3892.5
YFFB-1000	5×70	90.1×19.7	4847.7
YFFB-1000	3×95	61.9×21.9	3833.5
YFFB-1000	4×95	81.6×21.9	5082.7
YFFB-1000	5×95	101.3×21.9	6331.9

*可为客户提供特殊定